


MDSA Series

SMD Low Profile High Current Molded Inductor

Size 1040




FEATURES

- Shielded construction
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C(including self-temperature rise)
- Quantity: 500PCS

APPLICATION

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability.
- Boost-Converter
- Buck-Converter DC/DC

Dimensions: [mm]



Land Pattern: [mm]



Electrical Properties:

[illegible]

36.5

72.0

 3.0 ± 0.3

31.7

57.6

 3.0 ± 0.3

27.9

43.2

 3.0 ± 0.3

2689

ströct4
30.4

 3.0 ± 0.3

22.1

27.9

 2.5 ± 0.3







Tolerance











±20%	5.85
±20%	10.6
±20%	16.0
±20%	19.2
±20%	22.2
±20%	
±20%	
±20%	
±20%	
±20%	
±20%	
±20%	

Saturation Current will cause L to drop approximately 30%




Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

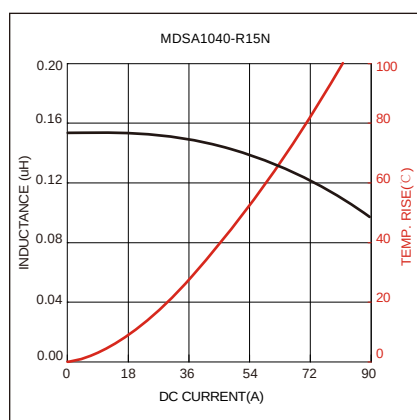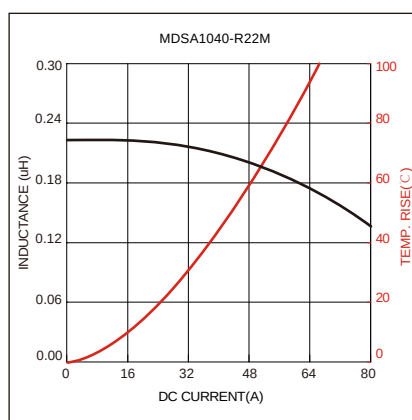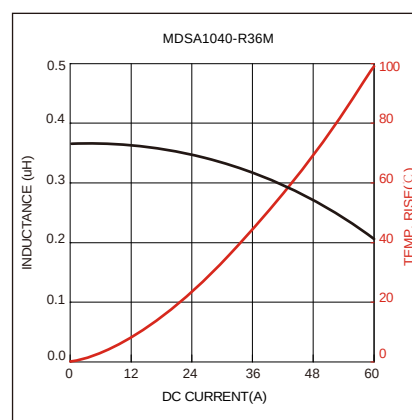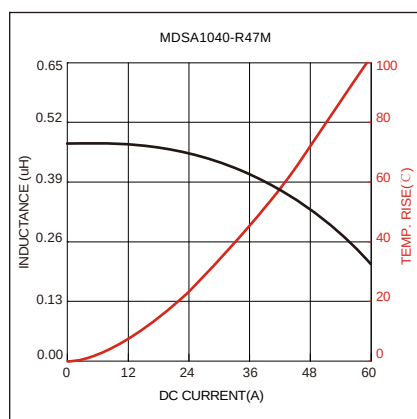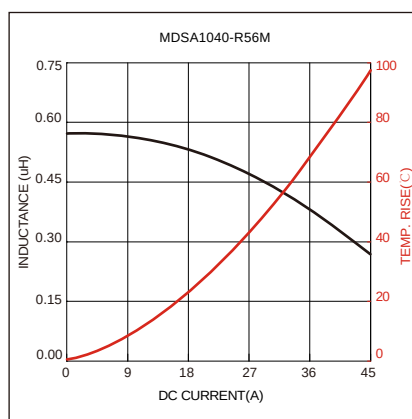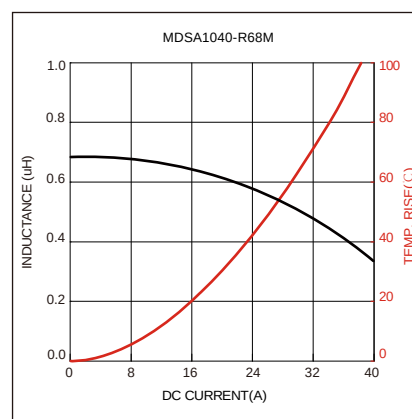


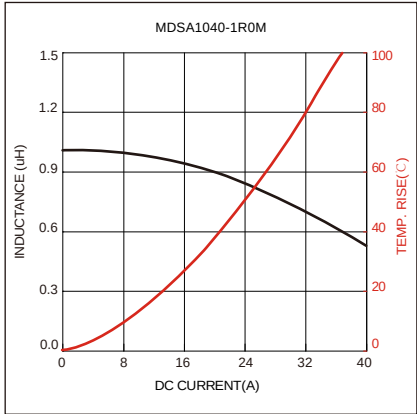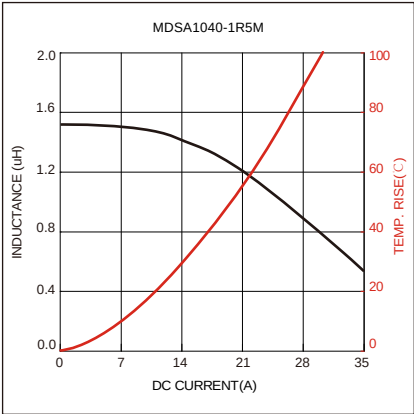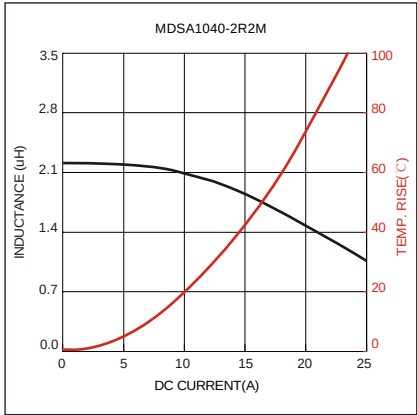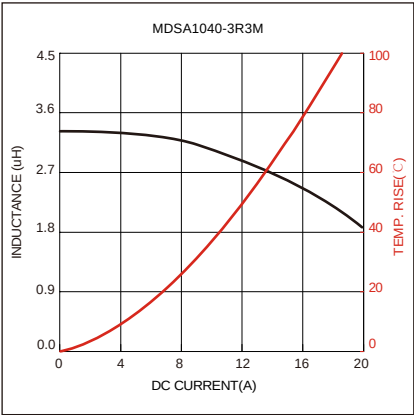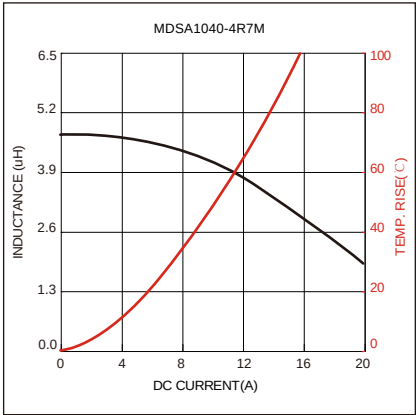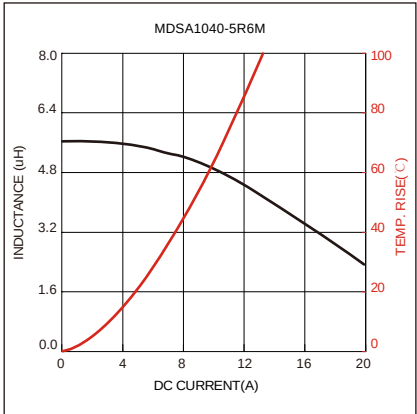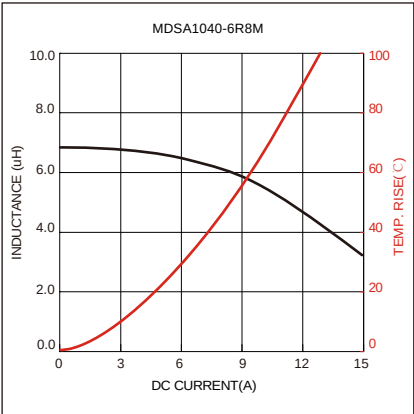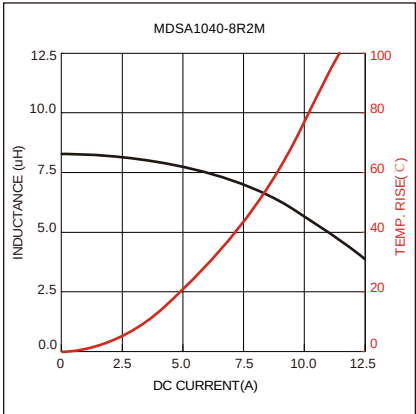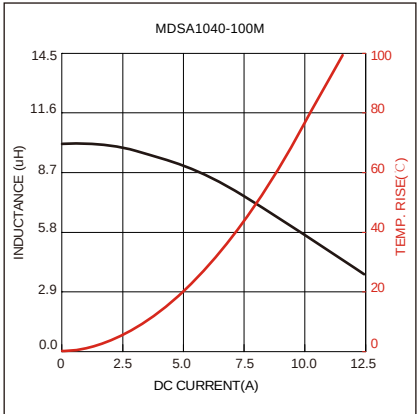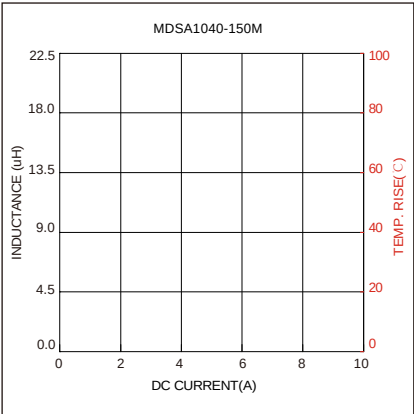


Typical Electrical Characteristics:

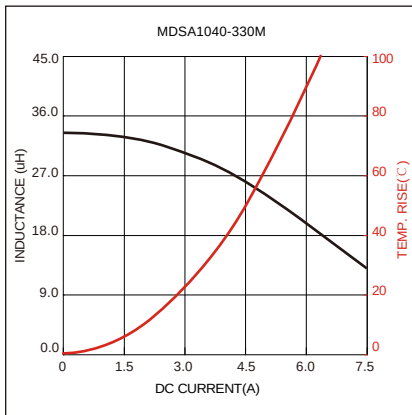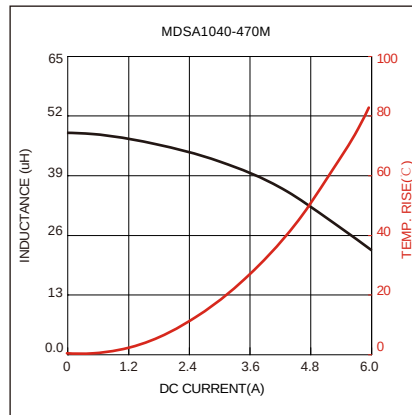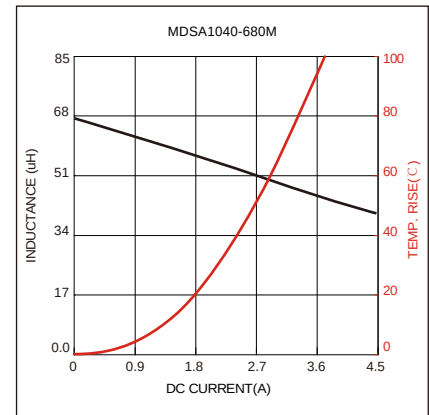

Reel Dimension: [mm]

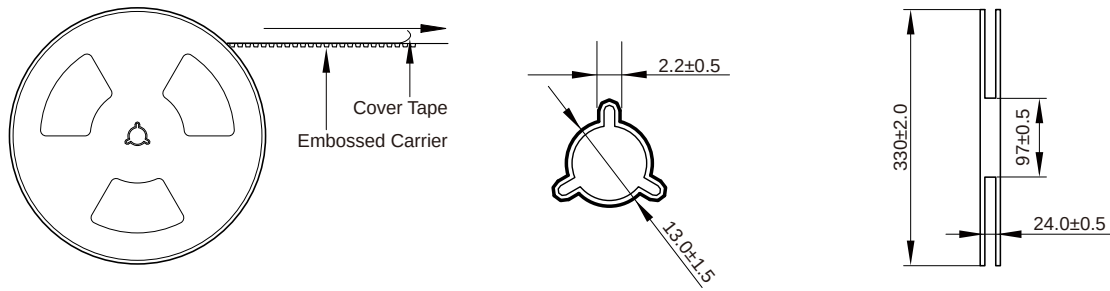

Packaging Quantity:

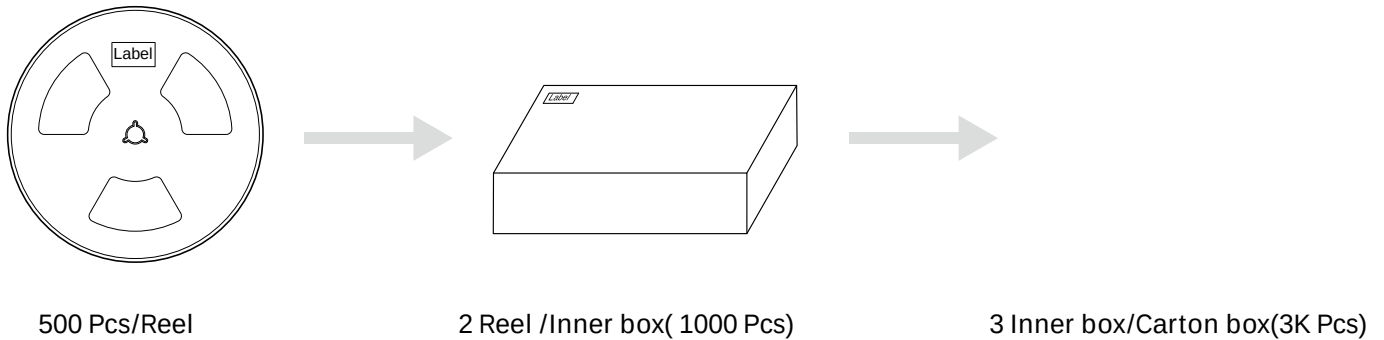

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.