

FBHA Series




FEATURES

-
- $\text{E} < \mu \text{E} \times$
 $\text{rY}\hat{\text{i}}\hat{\text{i}}\hat{\text{i}} < \mu \text{o} \text{]}.$
Operating temperature: -55 to +150 °C(including self-temperature rise)
Quantity: 10000PCS

-
- Power line filter for body controls, and car mul media etc.


APPLICATION

-

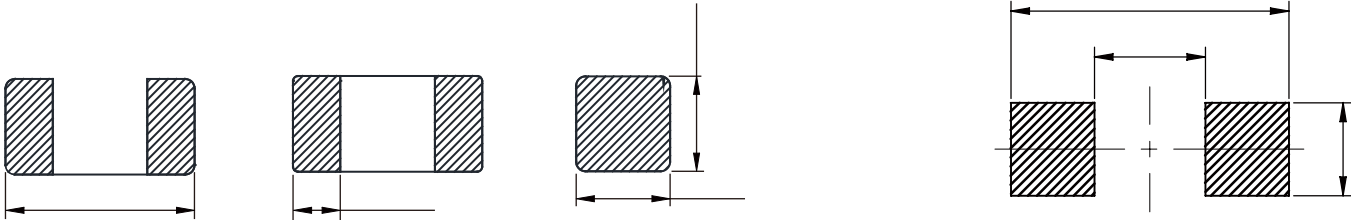


Part No	Impedance @ 100MHz (Ω)	Tolerance	DC Resistance Max. (Ω)	Rated Current Max. (mA)

referring to 40K self-heating above ambient temperature

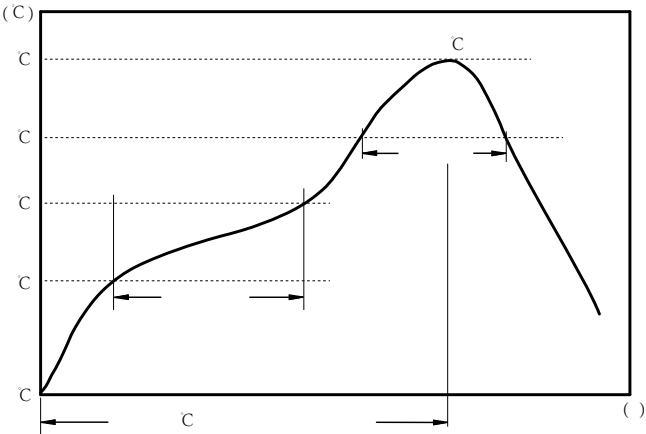


C
C
C

:

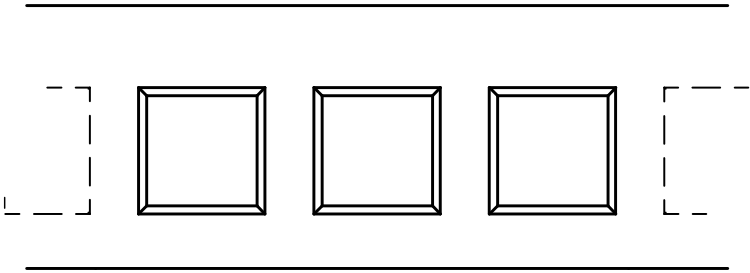

FBHA0402	0.62 ± 0.03	1.12 ± 0.03	1.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	8.0 ± 0.3	0.60 ± 0.03	1.75 ± 0.1	0.60 ± 0.03

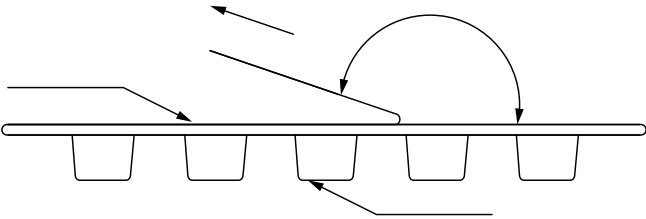

The peel force of top cover tape shall be between 0.14 to 0.58 N

