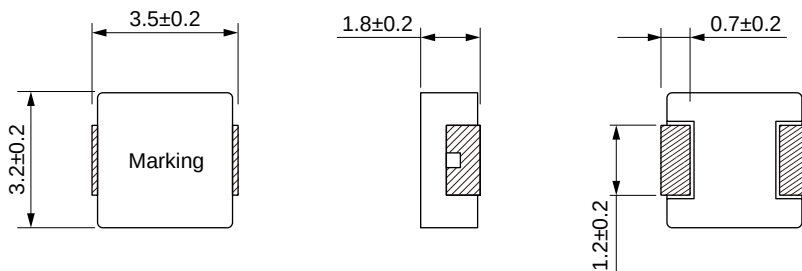



MDCA Series




SMD Power Inductor

Size 3020

[illegible]

INDUCTAN

Typical Electrical Characteristics:

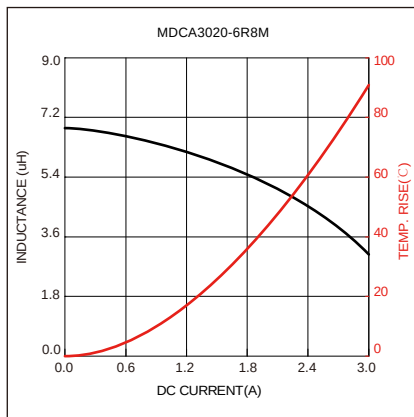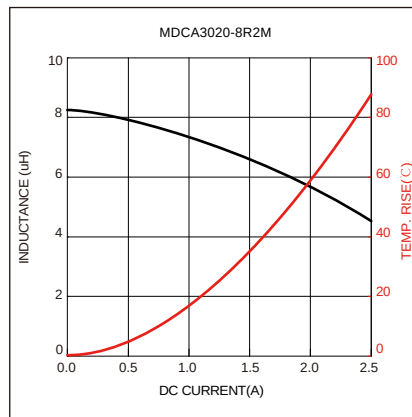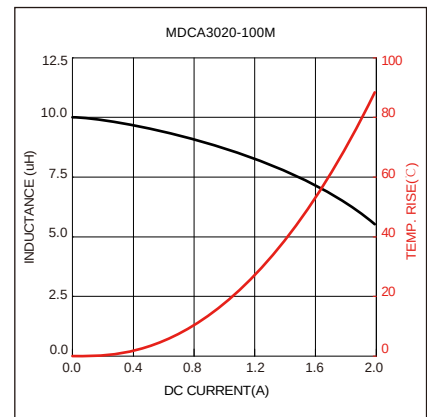


Soldering Reflow:

Packaging Information:


Tape Dimension :

Peel force of top cover tape:

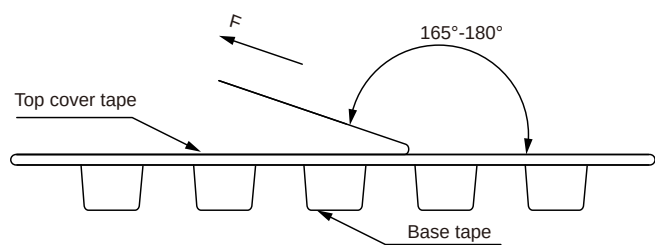


The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension: [mm]

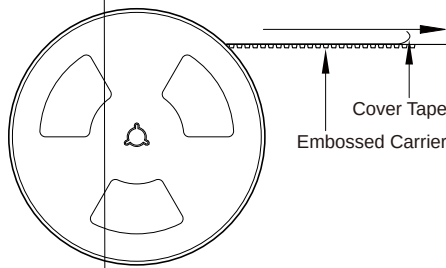


2.2±0.5

Cover Tape
Embossed Carrier



Packaging Quantity:



3000 Pcs/Reel

3 Reel /Inner box(9000 Pcs)

3 Inner box/Carton box(27K Pcs)

Cautions and Warnings:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle product carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions: