








- Shielded construction
 -
 -
 - Ultra low buzz noise, due to composite construction.
 -
 - AEC-Q200 qualified
 - Operating temperature: -55 to +155 °C(including self-temperature rise)
 - Quantity: 500PCS
-
- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability.
 - Boost-Converter
 - Buck-Converter DC/DC

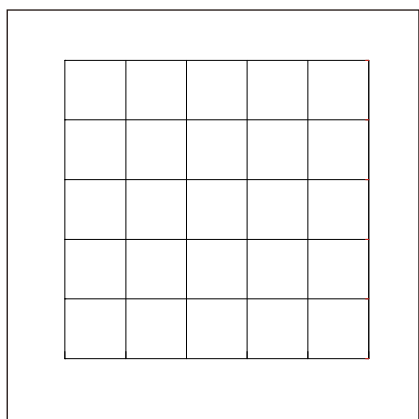


Temperature Rise Current Max. (A)		Saturation Current Max. (A)	E (mm)
		38.5	
			2.5±0.3
			2.5±0.3
			2.5±0.3
12.5		13.5	
6.95			
5.80			

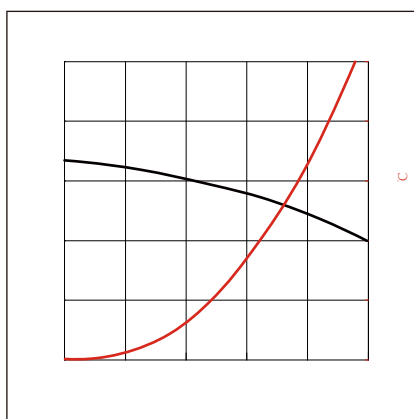

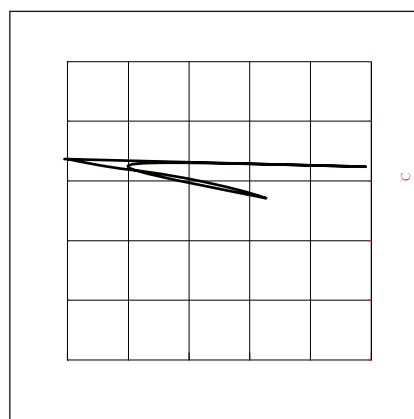

C
C
C





:

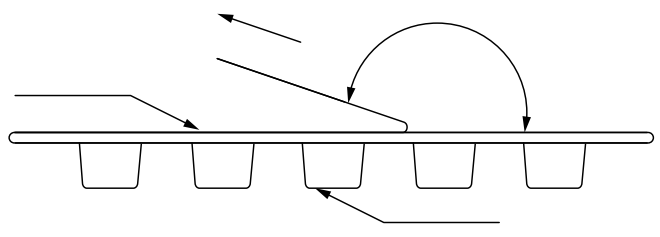


The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	KH+Printing Inductance+period)
---------	--------------------------------


:

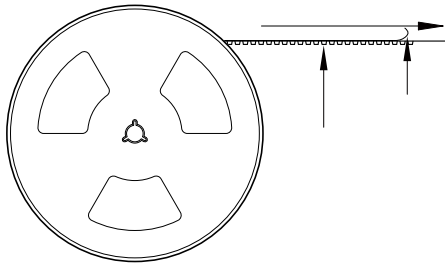

500 Pcs/Reel



2 Reel / Inner box(1000 Pcs)



3 Inner box/Carton box(3K Pcs)

:

•

•

•

•

•

•

•

•