

- $\nu dz \cdot y \text{ ә } \ddot{e} \Upsilon$  млллLJÖä

## APPLICATION








- / l·Nj yl·ØλE·ezyΣ Ōl·Nj áúŜNŜz l·yŘ Ōl·Nj l·ŌŌŜăăzNjλŜă zyřtē








Dimensions: [mm]



Land Pattern: [mm]

[illegible]



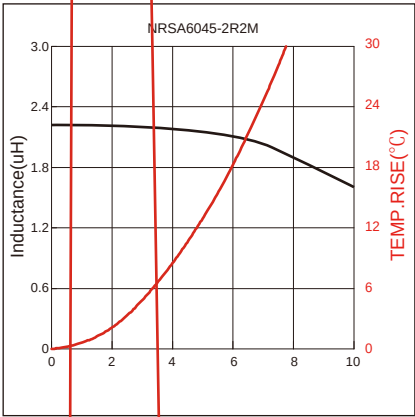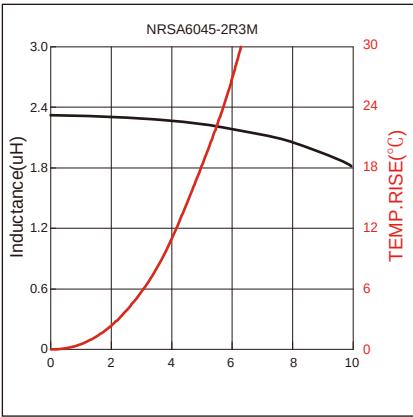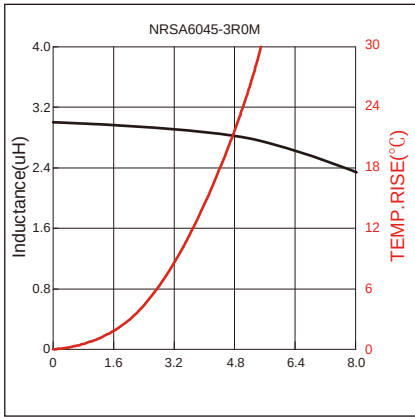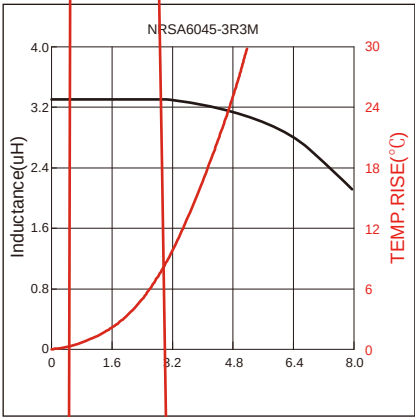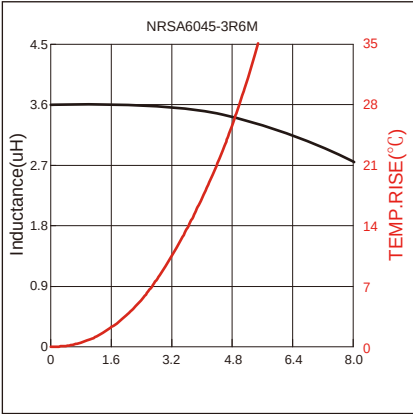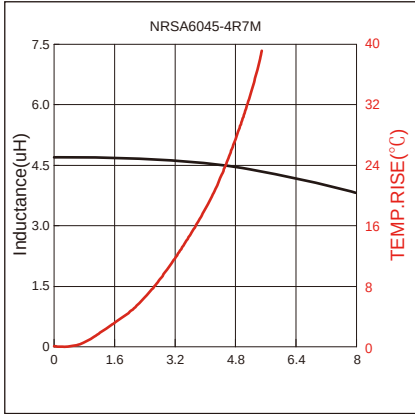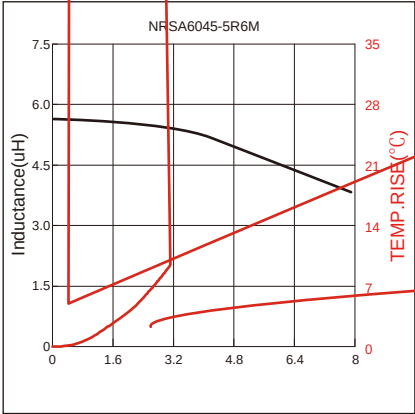

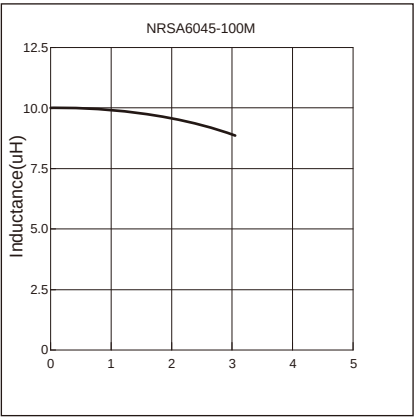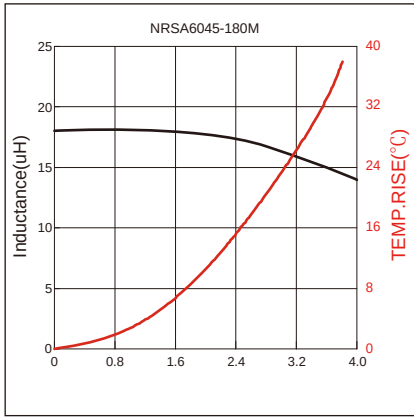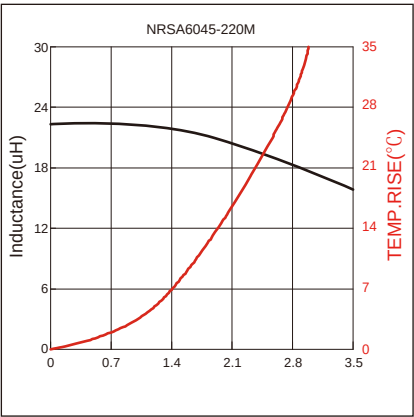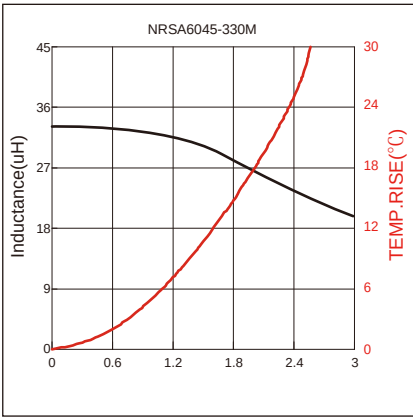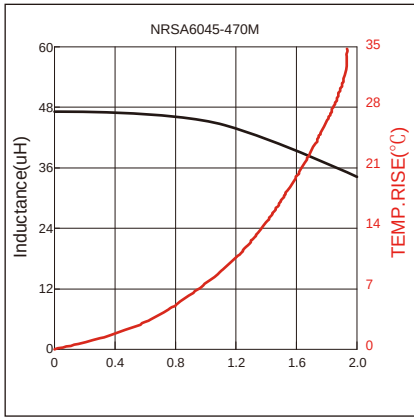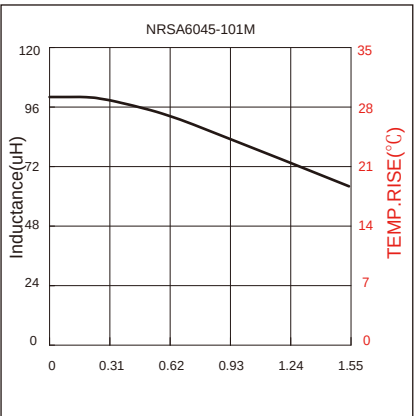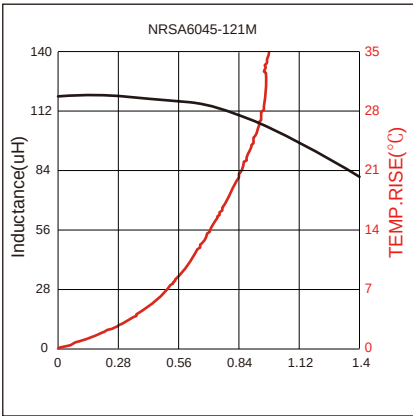

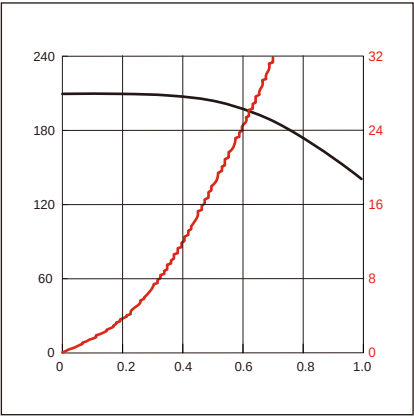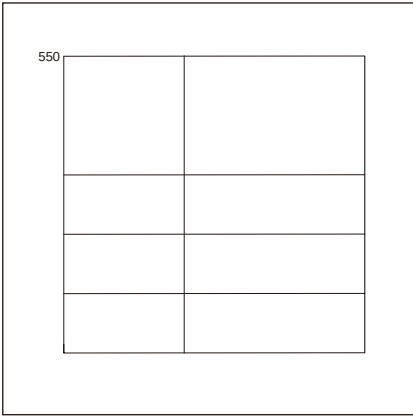


Soldering Reflow:

Preheat condition: 150 ~200°C/ 60~120 sec.  
Allowed time above 217°C: 60~90 sec.  
Max temperature: 260°C.  
Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

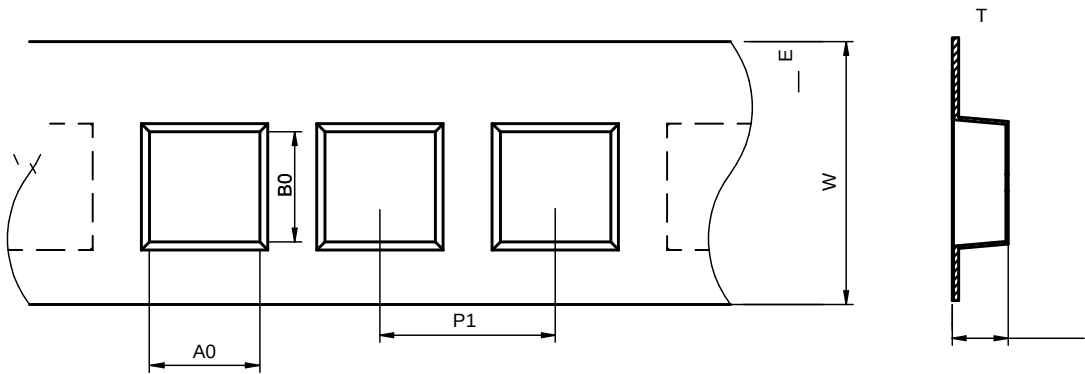


| A0<br>(mm) | B0<br>(mm) | D<br>(mm) | P0<br>(mm) | P1<br>(mm) | W<br>(mm) | K0<br>(mm) | E<br>(mm) | T<br>(mm) |
|------------|------------|-----------|------------|------------|-----------|------------|-----------|-----------|
| 6.4±0.1    | 6.4±0.1    | 1.5±0.1   | 4.0±0.1    | 12.0±0.1   | 16.0±0.3  | 4.7±0.1    | 1.75±0.1  | 0.40±0.05 |

Peel force of top cover tape:

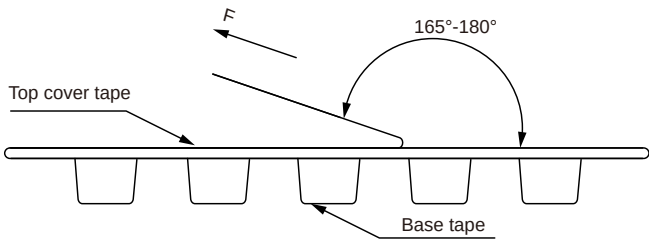


The peel force of top cover tape shall be between 0.3 to 1.17 N

Reel Dimension : [mm]

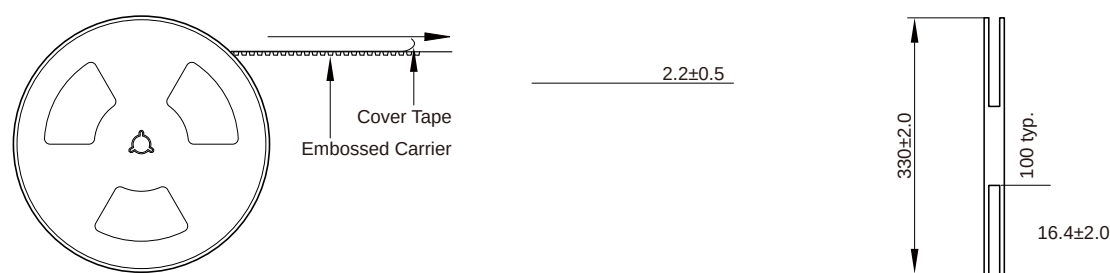

Packaging Quantity:

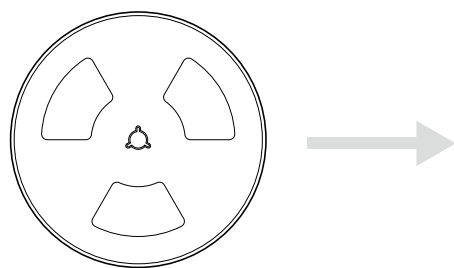

1000 Pcs/Reel

2 Reel /Inner box( 2K Pcs)

3 Inner box/Carton box(6K Pcs)

Cautions and Warnings:

Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the
- 
- 
- 

Operation Instructions:

- 
- 
- 
-