




Molding Power Inductors

Size 100510




- Higher current carrying Capacity, lower DCR, and more efficiency.
 - Operating temperature: -55 to +125 °C(Including self - temperature rise).
 - Quantity: 400PCS
-
- AI Servers, Data Centers, GPU/AI Accelerators.
 - Desktop Motherboards, CPU/GPU Power Delivery.
 - Multi-phase VRM, High-current DC-DC Converters.
 - Networking Equipment, Communication Infrastructure.

Dimensions: [mm]

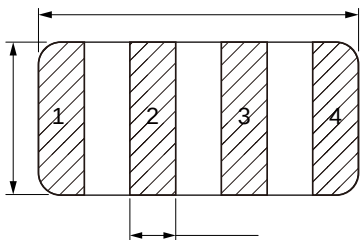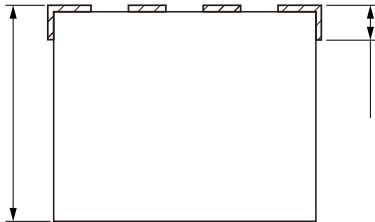

Schematic:



Electrical Properties:


Part No	Inductance 1-4/2-3 @ 100KHz/1V (μH)	FLL 1-4 Min. (nH)	DC Resistance 1-4 (mΩ)	DC Resistance 2-3 (mΩ)	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	Hi-Pot Min. (V)	Kps Min.

All test data is referenced to 25 °C ambient.
Saturation Current will cause L0 to drop approximately 30%.
Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40 °C.
FLL: tested @100 kHz, 1.0 Vrms, Isat, applied for +25 °C.
Hi-Pot: as pass / fail judgement, tested @ 2s,2mA, between 2 windings.

Soldering Reflow:

Packaging Information:

Tape Dimension :

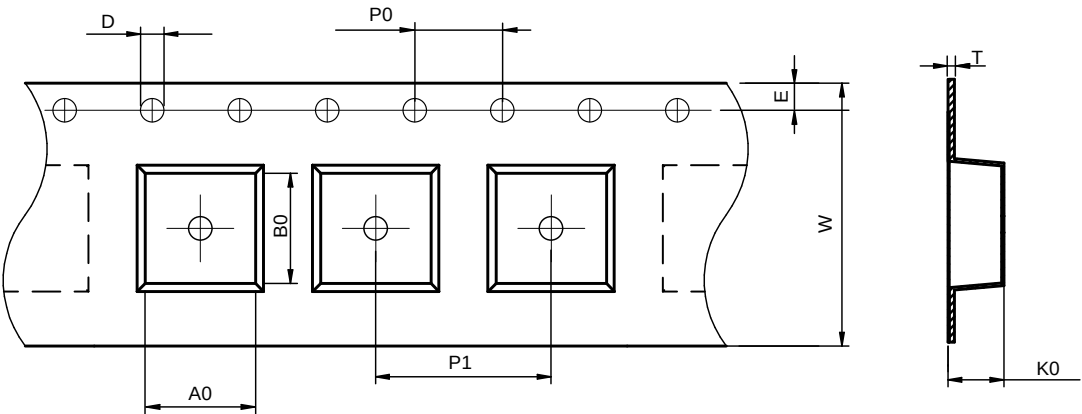

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)

Product Marking:

Marking	Printing Inductance)
---------	----------------------

